


# Emit for cross-country skiing



## Simple setup

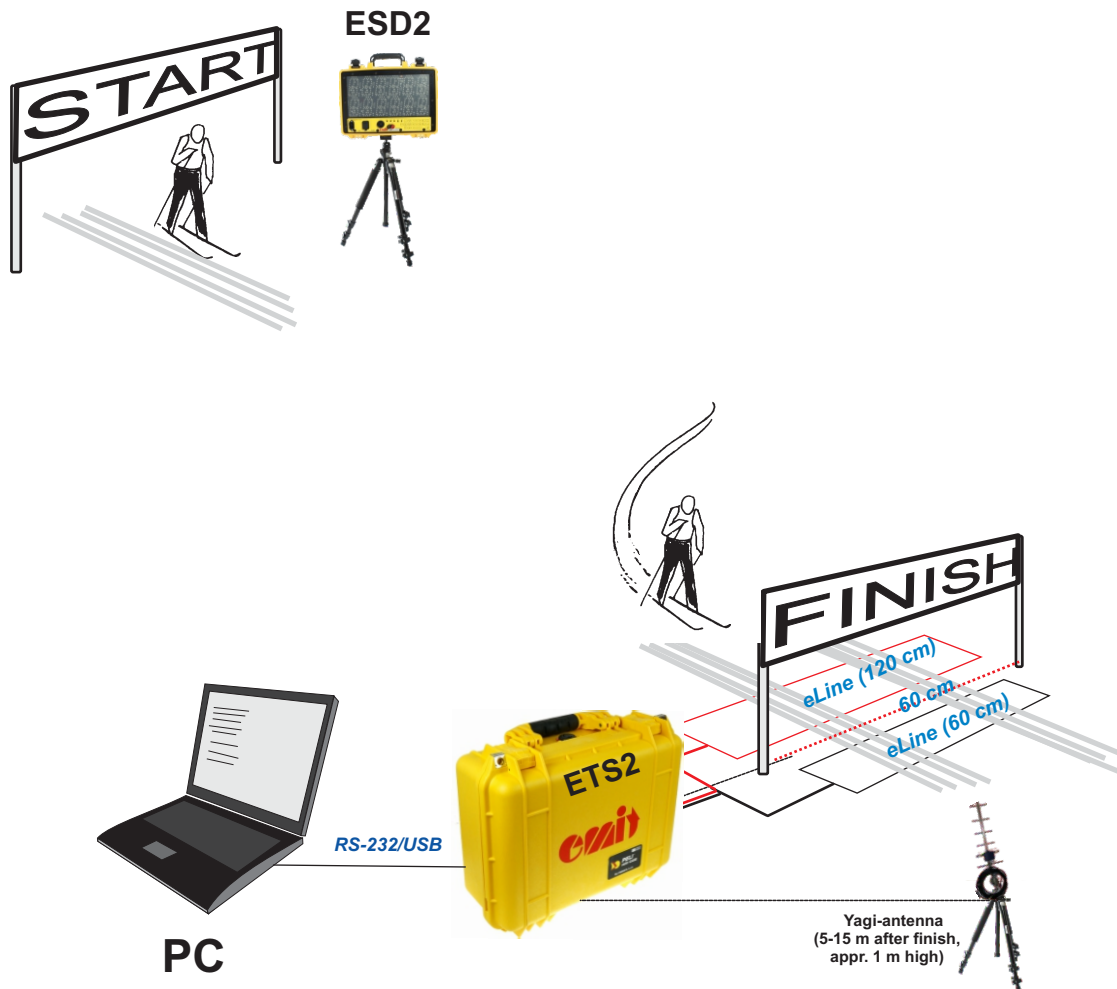

- Emit Start Display ESD2 is used at the start, with countdown and display of start number.
- At the finish, an ETS2 with double eLine loops is placed next to the finish line facing the track. A yagi antenna is placed 5-10 meters after the finishline, pointing towards the middle of the finishline.
- Data is transferred from ETS2 to a PC by RS-485, RS-232 or USB.